

WITNESS MONUMENT TIES			
ID	BEARING	DISTANCE	DESCRIPTION
Witness A	N 35d E	136.5'	Cut X in the northeast side of the 8" inside diameter cut-off metal sign base in the concrete sign base for People's State Bank
MONUMENT ACCESSORIES			
Other survey grade monuments that were located in the vicinity and their relation to the monument. Geodetic coordinates in this table are provided in the format Easting, Northing.			
(#10151)	S 31d14'58" E	53.50'	3110626.00, 1416424.08 Cut X in the west flange bolt of the signal pole at the southeast corner of the intersection
(#10154)	S 51d37'35" W	77.50'	3110537.49, 1416421.70 Cut X in the center of the northwest top of curb corner of the landscape island surround of the brick Huntington Center sign at the southwest corner of the intersection
(#10157)	N 77d25'4" W	93.83'	3110506.68, 1416490.25 Cut X in the north rim of a sanitary manhole at the northwest corner of the intersection

NOTES:

- Field work was performed on 02/27/2019.
- Monroe County Surveyor's Field Book 53, page 39.
- Project Name: T08NR01W-09-10, Field work by: RSO & TER, Drawn by: RSO, Reviewed by: RSO, TER & SRB.
- The basis of bearings is Grid North NAD83(2011), Indiana West Zone, Epoch 2010.0000, Geoid Model G2012BU7, Datum NAD83_NO_TRANS, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Distances obtained with GPS have not been adjusted to ground. Coordinate data was collected with a Javad Triumph LS Network Rover.
- Vicinity sketch was compiled per 2014 aerial photography.
- This monument was witnessed by the Monroe County Surveyor, Edmund Farkas, on March 15, 1983. We collected coordinates on the known monument in preparation for an upcoming construction project in the area. Historic research has not yet been performed to prove the validity of this monument.

▲ **Monument Description:** $\frac{5}{8}$ " rebar with no cap found 3" below grade in the centerline of Winslow Road and in the northbound lane of Henderson Street

State Plane Grid Coordinates: Point No.: 10160 Northing: 1416469.81', Easting: 3110598.25'

SHEET 1 OF 2	MONUMENT RECORD	Quarter Corner		OFFICE OF THE MONROE COUNTY SURVEYOR Trohn Enright-Randolph Monroe County Surveyor Rachel Savich Oser Professional Surveyor 119 West 7th Street, Bloomington, IN 47404 (812) 349-2570
	CORNER ID: Per_K09	Section 09 & 16- T08N-R01W Perry Township Monroe County, Indiana		

Photos were taken on 02/27/2019 with an iPhone 6s



Trohn Enright-Randolph
Trohn Enright-Randolph
Monroe County Surveyor

Accepted by the Monroe
County Surveyor Review Board
on 09/10/2019

Rachel Oser
Rachel Savich Oser, State of Indiana
Professional Surveyor No. 21100022

SHEET
2
OF
2

MONUMENT RECORD
CORNER ID:
Per_K09

Quarter Corner
Section 09 & 16- T08N-R01W
Perry Township
Monroe County, Indiana



OFFICE OF THE MONROE COUNTY SURVEYOR
Trohn Enright-Randolph Monroe County Surveyor
Rachel Savich Oser Professional Surveyor
119 West 7th Street, Bloomington, IN 47404 (812) 349-2570

MONUMENT RECORD



STATE OF INDIANA - COUNTY OF MONROE

SECTION 9, TOWNSHIP 8 NORTH, RANGE 1 WEST

MONUMENT DESCRIPTION & REMARKS

FOUND IRON ROD IN THE CENTERLINE OF WINSLOW RD. & IN LINE
WITH THE EAST SIDE OF HENDERSON ST. ON THE SOUTH SIDE OF
WINSLOW RD., IRON ROD IS 2 INCHES UNDER THE ASPHALT.

RECOVERY TIE DRAWING

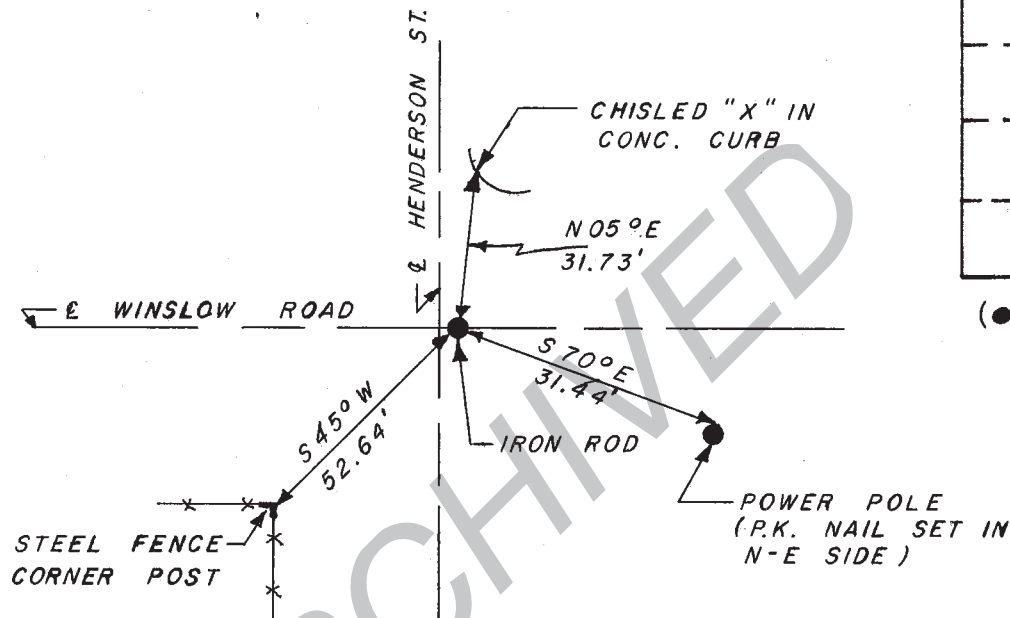

(•) AT CORNER



NOT TO SCALE

STATE OF INDIANA

COUNTY OF MONROE

I, EDMUND O. FARKAS HEREBY CERTIFY THAT THIS
DOCUMENT WAS PREPARED UNDER MY DIRECTION IN ACCORDANCE
WITH THE PROVISIONS OF SECTION 17-3-64-4 - 17-3-64-8 OF
THE INDIANA CODE, BEING ACTS OF 1965, CHAPTER 319; AND
THE ABOVE DATA IS GIVEN UNDER MY HAND AND SEAL
THIS 15 TH. DAY OF MARCH, 1983 A.D.

SPACE
RESERVED
FOR
RECORDING
OFFICER.

INDIANA REGISTERED LAND SURVEYOR NO. _____

OR _____

UNITED STATES GOVERNMENT AGENCY

TITLE _____

TOWNSHIP:
PERRY

CORNER I.D.

K - 9


K-9

REPORT AND RECORD OF

RECOVERED SECTION CORNER STONE

SEC. 16 TWP. 8N RGE. 1W

DUNLAP ENGINEERING	
DUNLAP & CO. P.O. BOX 328 COLUMBUS, IND. 47201 812-376-3021	
JOB NO.	72113
DATE	2 Oct 72 REK

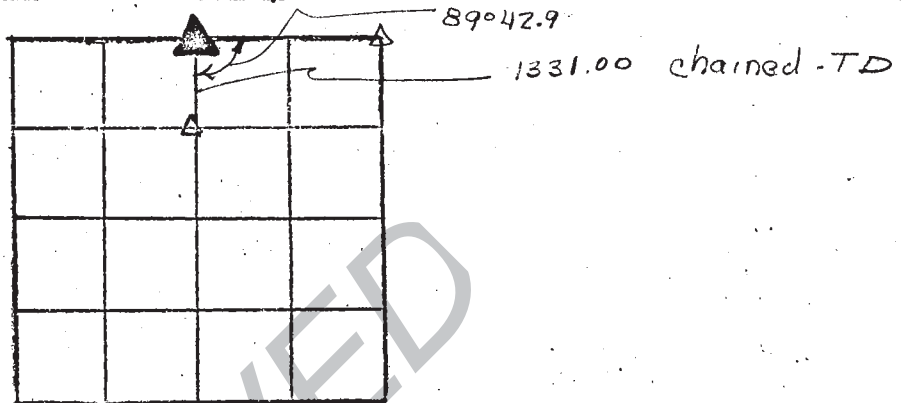

STATE PLANE COORDINATE SYSTEM

COORDINATES: E. & W. _____ N. & S. _____

AZIMUTH and BEARING DATUM DESCRIPTION ASSUMED:

N-89°-47'-15\"

Description of Stone _____

Depth beneath surface _____

Character of survey mark or point on Stone _____

Date Stone found _____ Party _____

Description of survey marker placed ~~on stone~~ Down 2\"

5/8\"

Date placed MAY 21, 1969 Party DUNLAP DEVELOPMENT C

Date of verification and certified signature of County Surveyor _____

REFERENCES

'PK' nails driven
through metal caps.

